

SELECTRONIC™ FloWise™ TOILET FLUSH VALVE

BATTERY POWERED, SENSOR OPERATED, 1.28 GPF



GENERAL DESCRIPTION:

Exposed, Battery Powered, Sensor Operated Selectronic™ Water Closet Flush Valve for floor-mounted or wall-hung top spud bowls.

Inlet includes 1" I.P.S. angle stop with vandal-resistant cap, sweat solder kit, cover tube and wall flange. Outlet includes 1-1/2" vacuum breaker with adjustable tailpiece, spud coupling and flange.

PRODUCT FEATURES:

- Electronic flush valve with Selectronic™ proximity system for "Hands Free" operation
- Self-Cleaning Piston operation helps prevent clogging and reduces maintenance
- Positive seal ensures leak-free performance
- No external volume adjustment reduces the possibility of wasteful valve adjustment or vandalism
- Range can be adjusted manually or by remote control
- Sensor & electronic controls are fully enclosed and water resistant
- Fully mechanical Manual Override Button can flush toilet during a power outage
- Automatically flushes after 24 hours of non-use to maintain trap seal
- 3-second Flush Delay
- Low Battery indicator
- Factory-installed 6V lithium battery included
- Can be installed left or right-handed
- ADA compliant

MODEL NUMBER:

- ❑ **6065121.002** Flush Valve for 11-1/2" Supply C\I to top of bowl, 1.28 gpf
- ❑ **6065122.002** Flush Valve for 27" Supply C\I to top of bowl, 1.28 gpf
- ❑ **6065525.002** Retrofit for Existing Flush Valves, 1.28 gpf. Replaces industry standard manual and electronic valves.

OPERATING PRESSURE:

Overall Range: 20-125 psi

Recommended: 35-80 psi

BATTERY LIFE:


Up to 4-year life, (approx. 200,000 cycles)

ACCESSORIES:

- Cast wall flanges (3/4", 1" & 1-1/2")
- Solid ring pipe supports (2-1/2" & 6" C-E)
- Split ring pipe supports (2-1/2" & 6" C-E)



TYPICAL WATER CLOSET INSTALLATION: AFWALL™ TOILET SHOWN

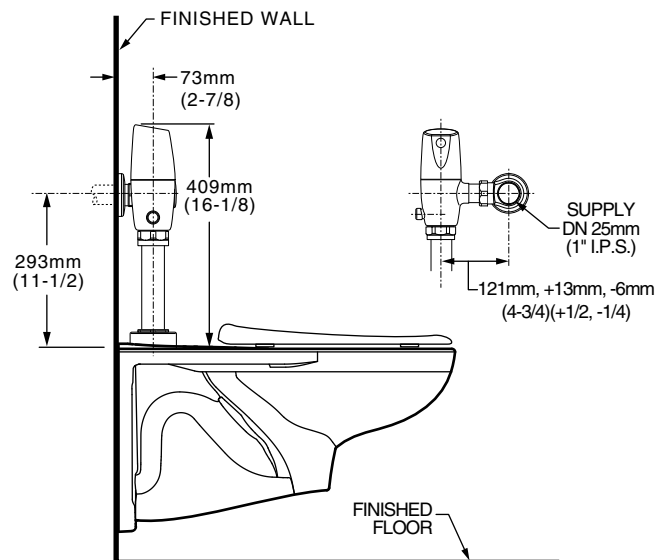

RECOMMENDED SPECIFICATION:


Electronic proximity infrared sensor activated toilet flush valve shall feature self-cleaning piston valve and an exclusive flow control mechanism that eliminates water pressure adjustment after installation. Includes cast brass valve body and metal cover with chrome finish, vandal resistant stop cap, lithium battery and mechanical manual override button. Angle stop and vacuum breaker included. 1.28 gpf / 4.8 Lpf Flush valve shall be American Standard Model # 6065.12_.002.

**SELECTRONIC™ FloWise™
TOILET FLUSH VALVE**
BATTERY POWERED, SENSOR OPERATED, 1.28 GPF

LISTINGS:

- ASSE 1037
- ANSI/ASME A112.19.2
- ADA Compliant

Roughing-in Dimensions

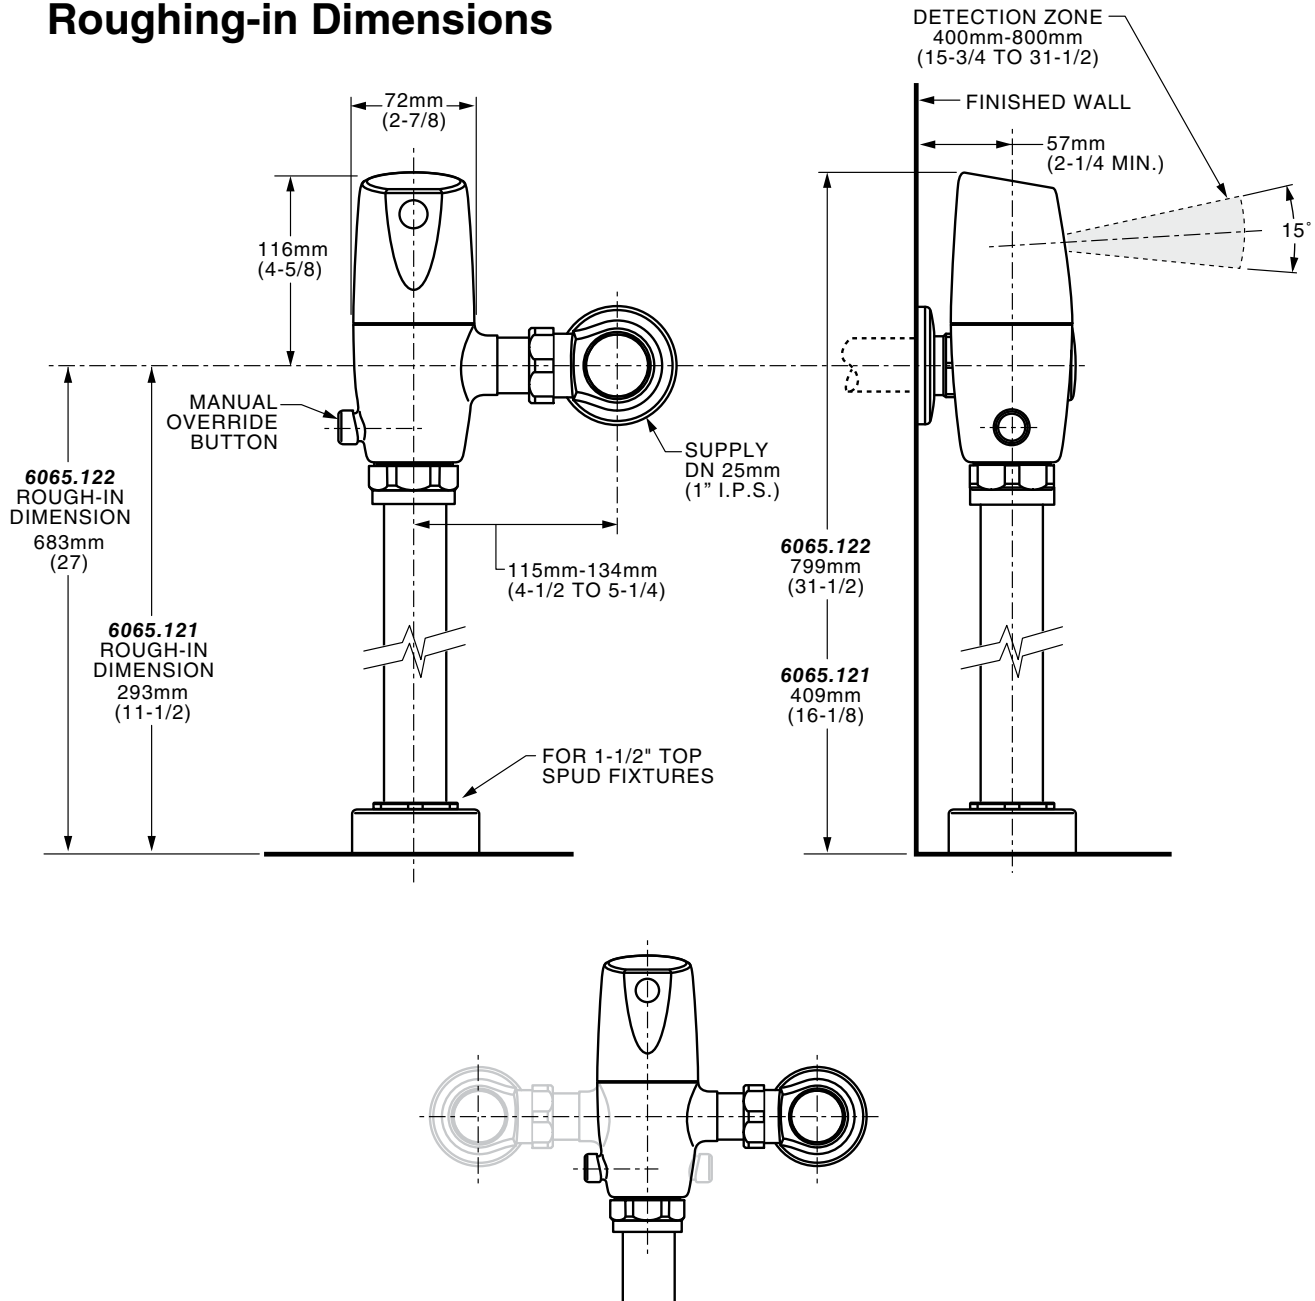

Right or Left Hand Installation